

A Liquefaction Evaluation Procedure Based on Shear Wave Velocity

by

Ronald D. Andrus¹ and Kenneth H. Stokoe, II²

ABSTRACT

This paper outlines a procedure for evaluating liquefaction resistance of soils using shear wave velocity measurements. The procedure follows the general format of the Seed-Idriss simplified procedure based on SPT blow count. It was developed following suggestions from industry, researchers, and practitioners, and using case history data from 26 earthquakes and over 70 measurement sites in soils ranging from sand to sandy gravel with cobbles to profiles including silty clay layers. The procedure correctly predicts moderate to high liquefaction potential for over 95 % of the liquefaction case histories. A case study is provided to illustrate the application of the proposed procedure.

KEYWORDS: Building technology; earthquake engineering; *in situ* measurements; seismic testing; shear wave velocity; soil liquefaction.

1. INTRODUCTION

Evaluating the liquefaction resistance of soils is an important step in the engineering design of new structures and the retrofit of existing structures in earthquake-prone regions. The evaluation procedure widely used in the United States and throughout much of the world is termed the *simplified procedure*. This simplified procedure was originally developed by Seed and Idriss (1971) using blow counts from the Standard Penetration Test (SPT) correlated with a parameter representing the seismic loading on the soil, called the *cyclic stress ratio*.

Small-strain shear wave velocity, V_s , measurements provide a promising alternative, or supplement, to the penetration-based approach. The use of V_s as an index of liquefaction resistance is soundly based, since both V_s and liquefaction resistance are similarly influenced by void ratio, state of stress, stress history, and geologic age. Furthermore, the strong theoretical basis underlying stress wave propagation offers the opportunity for additional advances in the approach.

During the past two decades, several simplified procedures for evaluating liquefaction resistance based on V_s have been proposed (Dobry et al., 1981; Dobry et al., 1982; Seed et al., 1983; Bierschwale and Stokoe, 1984; de Alba et al., 1984; Hynes, 1988; Stokoe et al., 1988; Tokimatsu and Uchida, 1990; Tokimatsu et al., 1991; Robertson et al., 1992; Kayen et al., 1992; Andrus, 1994; Lodge, 1994; Rashidian, 1995; Kayabali, 1996; Andrus and Stokoe, 1997; Rollins et al., 1998; and Andrus et al., 1999). Some of these procedures follow the general format of the Seed-Idriss simplified procedure, where V_s is corrected to a reference overburden stress and correlated with the cyclic stress ratio. Nearly all were developed with limited or no field performance data. This paper outlines the procedure proposed by Andrus and Stokoe (1997), and updated by Andrus et al. (1999) using an expanded database.

The expanded database compiled by Andrus et al. (1999) consists of field performance data from 26 earthquakes and V_s measurements at

¹ Research Civil Engineer, National Institute of Standards and Technology, 100 Bureau Drive Stop 8611, Gaithersburg, Maryland 20899-8611.

² Professor, Department of Civil Engineering, ECJ 9.227, The University of Texas at Austin, Austin, Texas 78712

over 70 sites. Much of the new data are from the 1995 Hyogoken-Nanbu (Kobe), Japan earthquake (moment magnitude, $M_w = 6.9$).

2. LIQUEFACTION RESISTANCE FROM V_S

2.1 Cyclic Stress Ratio (CSR)

The cyclic stress ratio, τ_{av}/σ'_v , at a particular depth in a level soil deposit can be expressed as (Seed and Idriss, 1971):

$$CSR = \frac{\tau_{av}}{\sigma'_v} = 0.65 \left(\frac{a_{max}}{g} \right) \left(\frac{\sigma_v}{\sigma'_v} \right) r_d \quad (1)$$

where τ_{av} is the average equivalent uniform cyclic shear stress caused by the earthquake and is assumed to be 0.65 of the maximum induced stress, a_{max} is the peak horizontal ground surface acceleration, g is the acceleration of gravity, σ_v is the initial effective vertical (overburden) stress at the depth in question, σ'_v is the total overburden stress at the same depth, and r_d is a shear stress reduction coefficient to adjust for flexibility of the soil profile.

2.2 Stress-Corrected Shear Wave Velocity

Following the traditional procedures for correcting SPT blow count to account for overburden stress, one can correct V_S to a reference overburden stress by (Sykora, 1987; Robertson et al., 1992):

$$V_{Sl} = V_S \left(\frac{P_a}{\sigma'_v} \right)^{0.25} \quad (2)$$

where V_{Sl} is the overburden stress-corrected shear wave velocity, P_a is a reference stress, 100 kPa or about atmospheric pressure, and σ'_v is initial effective overburden stress in kPa. In using Eq. (2), it is implicitly assumed that the initial effective horizontal stress, σ'_h , is a constant factor of the effective overburden stress. The factor, generally referred to as K'_o , is assumed to be approximately 0.5 at sites where liquefaction has occurred. Also, in applying Eq. (2), it is implicitly assumed that V_S

is measured with both the directions of particle motion and wave propagation polarized along principal stress directions and one of these directions is vertical (Stokoe et al., 1985).

2.3 Cyclic Resistance Ratio (CRR)

The value of CSR separating liquefaction and non-liquefaction occurrences for a given V_{Sl} , or corrected blow count, is called the *cyclic resistance ratio*.

Andrus and Stokoe (1997) proposed the following relationship between CRR and V_{Sl} :

$$CRR = \left\{ a \left(\frac{V_{Sl}}{100} \right)^2 + b \left(\frac{1}{V_{Sl}^* - V_{Sl}} - \frac{1}{V_{Sl}^*} \right) \right\} MSF \quad (3)$$

where V_{Sl}^* is the limiting upper value of V_{Sl} for liquefaction occurrence, a and b are curve fitting parameters, and MSF is the magnitude scaling factor. The first term of Eq. (3) is based on a modified relationship between V_{Sl} and CSR for constant average cyclic shear strain suggested by R. Dobry (personal communication to R. D. Andrus, 1996; Andrus and Stokoe, 1997). The second term is a hyperbola with a small value at low values of V_{Sl} , and a very large value as V_{Sl} approaches V_{Sl}^* .

The magnitude scaling factor, which accounts for the effect of earthquake magnitude on CRR, can be expressed by:

$$MSF = \left(\frac{M_w}{7.5} \right)^n \quad (4)$$

where n is an exponent. The lower bound for the range of magnitude scaling factors recommended by the 1996 National Center for Earthquake Engineering Research (NCEER) Workshop on Evaluation of Liquefaction Resistance of Soils (Youd et al., 1997) is defined by Eq. (4) with $n = -2.56$ (Idriss, personal communication to T. L. Youd, 1995).

Figure 1 presents the case history data for magnitude 5.9 to 8.3 earthquakes adjusted using Eq. (4) with $n = -2.56$. Also presented in Fig. 1 are the proposed $CRR-V_{SI}$ curves. The curves are defined by Eq. (3) with $a = 0.022$, $b = 2.8$, $V_{SI}^* = 200$ m/s for fines content (FC) ≥ 35 %, $V_{SI}^* = 208$ m/s for $FC = 20$ %, and $V_{SI}^* = 215$ m/s for $FC \leq 5$ %. The case histories, and $CRR-V_{SI}$ curves, are limited to relatively level ground sites with average depths less than 10 m, uncemented soils of Holocene age, ground water table depths between 0.5 m and 6 m, and V_S measurements made below the water table.

Of the 90 liquefaction case histories shown in Fig. 1, only two incorrectly lie in the no-liquefaction region. The two liquefaction cases that lie in the no-liquefaction region are for sites at Treasure Island, California. These sites are located along the perimeter of the island where liquefaction was marginal during the 1989 Loma Prieta earthquake ($M_w = 7.0$).

2.4 Factor of Safety

A common way to quantify the hazard for liquefaction is in terms of a factor of safety, FS . The FS against liquefaction can be defined by:

$$FS = \frac{CRR}{CSR} \quad (5)$$

Liquefaction is predicted to occur when $FS \leq 1$, and liquefaction is predicted not to occur when $FS > 1$. The acceptable value of FS for a particular site will depend on several factors, including the acceptable level of risk for the project, the extent and accuracy of seismic measurements, the availability of other site information, and the conservatism in determining the design earthquake magnitude and the expected value of a_{max} .

3. CASE STUDY

Figure 2 presents the liquefaction evaluation for a crosshole test array at the Treasure Island Fire Station site and the 1989 Loma Prieta earthquake. Values of V_{SI} and CSR shown in

Figs. 2(a) and 2(d), respectively, were calculated assuming soil densities of 1.76 Mg/m^3 above the water table and 1.92 Mg/m^3 below the water table. Based on a_{max} of 0.16 g and 0.11 g recorded in two horizontal directions at the fire station during the 1989 earthquake (Brady and Shakal, 1994), a geometric mean value of 0.13 g was used to calculate CSR .

Values of FS shown in Fig. 2(e) are less than 1 for the depths of 4 m to 9 m. Between the depths of 4 m and 7 m, the sand contains non-plastic fines and is considered liquefiable. Between the depths of 7 m and 9 m, the soil exhibits plastic characteristics and may be non-liquefiable by the so-called Chinese criteria. According to the Chinese criteria, non-liquefiable clayey soils have clay contents (particles smaller than $5 \mu\text{m}$) ≥ 15 %, liquid limits ≥ 35 %, or moisture contents ≤ 90 % of the liquid limit (Seed and Idriss, 1982). Thus, the layer most likely to liquefy, or the critical layer, lies between the depths of 4 m and 7 m.

Although no sand boils or ground cracks occurred at the site during the 1989 earthquake, there is a sudden drop in the fire station strong ground motion recordings at about 15 seconds and small motion afterwards (Idriss, 1990). This behavior is unlike behavior observed in recordings at other seismograph stations located on soft-soil sites in the San Francisco Bay area. De Alba et al. (1994) attributed this behavior to liquefaction of an underlying sand. It is possible that the 4 m thick layer capping the site, predicted not to liquefy in Figs. 2(d) and 2(e), prevented the formation of sand boils at the ground surface (Ishihara, 1985).

4. CONCLUSIONS

Outlined in this paper is a procedure for evaluating liquefaction resistance through V_S measurements. The proposed procedure follows the general format of the Seed-Idriss simplified procedure based on SPT blow count. Liquefaction criteria based on V_S have been developed with case history data from soils ranging from sand to sandy gravel with cobbles

to profiles including silty clay layers. Caution should be exercised when applying the procedure to sites where conditions are different from the database. Additional well-documented case histories with all types of soil that have and have not liquefied during earthquakes are needed, particularly from denser soils ($V_{SI} > 200$ m/s) shaken by stronger ground motions ($a_{max} > 0.4$ g), to further validate the procedure.

5. ACKNOWLEDGMENTS

The authors gratefully acknowledge the review of this work by the participants of the 1996 NCEER and the 1998 Multidisciplinary Center for Earthquake Engineering Research (MCEER, formally NCEER) Workshops on Evaluation of Liquefaction Resistance of Soils. We thank Riley Chung for his support and encouragement, and Nicholas Carino and Alan Rauch for their reviews. Also, special thanks to Susumu Iai, Kohji Ichii, Osamu Matsuo, Susumu Yasuda, Mamoru Kanatani, Yukihiisa Tanaka, Kohji Tokimatsu, K. Ishihara, and Takeji Kokusho for the information on Japanese liquefaction studies graciously shared with the first author.

6. REFERENCES

1. Andrus, R. D. (1994). "In Situ Characterization of Gravelly Soils That Liquefied in the 1983 Borah Peak Earthquake," *Ph.D. Dissertation*, The Univ. of Texas at Austin.
2. Andrus, R. D., and Stokoe, K. H., II (1997). "Liquefaction Resistance Based on Shear Wave Velocity," *NCEER Workshop on Evaluation of Liquefaction Resistance of Soils*, Technical Report NCEER-97-0022, T. L. Youd and I. M. Idriss, Eds., 4-5 Jan. 1996, Nat. Ctr. for Earthquake Engrg. Res., Buffalo, NY, pp. 89-128.
3. Andrus, R. D., Stokoe, K. H., II, and Chung, R. M. (1999). "Draft Guidelines for Evaluating Liquefaction Resistance Using Shear Wave Velocity Measurements and Simplified Procedures," *NISTIR 6277*, Nat. Institute of Standard and Technology, Gaithersburg, MD.
4. Bierschwale, J. G., and Stokoe, K. H., II (1984). "Analytical Evaluation of Liquefaction Potential of Sands Subjected to the 1981 Westmorland Earthquake," *Geotech. Engrg. Report GR-84-15*, The Univ. of Texas at Austin.
5. Brady, A. G., and Shakal, A. F. (1994). "Strong-Motion Recordings," *The Loma Prieta, Calif., Earthquake of Oct. 17, 1989-Strong Ground Motion*, U.S. Geological Survey Professional Paper 1551-A, R. D. Borchardt, Ed., U.S. Gov. Printing Office, Washington, D.C., pp. A9-A38.
6. de Alba, P., Baldwin, K., Janoo, V., Roe, G., and Celikkol, B. (1984). "Elastic-Wave Velocities and Liquefaction Potential," *Geotech. Testing J.*, ASTM, Vol. 7, No. 2, pp. 77-87.
7. de Alba, P., Benoît, J., Pass, D. G., Carter, J. J., Youd, T. L., and Shakal, A. F. (1994). "Deep Instrumentation Array at the Treasure Island Naval Station," *The Loma Prieta, Calif., Earthquake of Oct. 17, 1989-Strong Ground Motion*, U.S. Geological Survey Professional Paper 1551-A, R. D. Borchardt, Ed., U.S. Gov. Printing Office, Washington, D.C., pp. A155-A168.
8. de Alba, P., and Faris, J. R. (1996). "Workshop on Future Research Deep Instrumentation Array, Treasure Island NGES, July 27, 1996: Report to the Workshop Current State of Site Characterization and Instrumentation," Univ. of New Hampshire at Durham.
9. Dobry, R., Ladd, R. S., Yokel, F. Y., Chung, R. M., Powell, D. (1982). "Prediction of Pore Water Pressure Buildup and Liquefaction of Sands During Earthquakes by the Cyclic Strain Method," *NBS Building Science Series 138*, Nat. Bureau of Standards, Gaithersburg, MD.
10. Dobry, R., Stokoe, K. H., II, Ladd, R. S., and Youd, T. L. (1981). "Liquefaction Susceptibility from S-Wave Velocity," *Proc., In Situ Tests to Evaluate Liquefaction Susceptibility*, ASCE Nat. Convention, 27 Oct., St. Louis, MO.
11. Fuhrman, M. D. (1993). "Crosshole Seismic Tests at Two Northern California Sites Affected by the 1989 Loma Prieta Earthquake," *M.S. Thesis*, The Univ. of Texas at Austin.
12. Hynes, M. E. (1988). "Pore Pressure Generation Characteristics of Gravel Under Undrained Cyclic Loading," *Ph.D. Dissertation*, Univ. of Calif., Berkeley.

13. Idriss, I. M. (1990). "Response of Soft Soil Sites During Earthquakes," *H. Bolton Seed Memorial Symposium*, BiTech Publisher, Vancouver, B.C., Vol. 2, pp. 273-289.
14. Ishihara, K. (1985). "Stability of Natural Deposits During Earthquakes," *Proc., Eleventh Int. Conf. on Soil Mechanics and Found. Engrg.*, A. A. Balkema Publishers, Rotterdam, Netherlands, pp. 321-376.
15. Kayabali, K. (1996). "Soil Liquefaction Evaluation Using Shear Wave Velocity," *Engrg. Geology*, Elsevier Publisher, New York, NY, Vol. 44, No. 4, pp. 121-127.
16. Kayen, R. E., Mitchell, J. K., Seed, R. B., Lodge, A., Nishio, S., and Coutinho, R. (1992). "Evaluation of SPT-, CPT-, and Shear Wave-Based Methods for Liquefaction Potential Assessment Using Loma Prieta Data," *Proc., Fourth Japan-U.S. Workshop on Earthquake Resistant Design of Lifeline Facilities and Countermeasures for Soil Liquefaction*, Technical Report NCEER-92-0019, M. Hamada and T. D. O'Rourke, Eds., 27-29 May, Honolulu, Hawaii, Nat. Ctr. for Earthquake Engrg. Res., Buffalo, NY, Vol. 1, pp. 177-204.
17. Lodge, A. L. (1994). "Shear Wave Velocity Measurements for Subsurface Characterization," *Ph.D. Dissertation*, Univ. of Calif. at Berkeley.
18. Rashidian, M. (1995). "Undrained Shearing Behavior of Gravelly Sands and its Relation with Shear Wave Velocity," *Thesis*, Geotech. Engrg. Lab., Dept. of Civil Engrg., Univ. of Tokyo, Japan.
19. Robertson, P. K., Woeller, D. J., and Finn, W. D. L. (1992). "Seismic Cone Penetration Test for Evaluating Liquefaction Potential Under Cyclic Loading," *Canadian Geotech. J.*, Vol. 29, pp. 686-695.
20. Rollins, K. M., Diehl, N. B., and Weaver, T. J. (1998). "Implications of V_s -BPT (N_1)₆₀ Correlations for Liquefaction Assessment in Gravels," *Geotech. Earthquake Engrg. and Soil Dyn. III*, Geotech. Special Pub. No. 75, P. Dakoulas, M. Yegian, and B. Holtz, Eds., ASCE, Vol. I, pp. 506-517.
21. Seed, H. B., and Idriss, I. M. (1971). "Simplified Procedure for Evaluating Soil Liquefaction Potential," *J. of the Soil Mechanics and Found. Div.*, ASCE, Vol. 97, SM9, pp. 1249-1273.
22. Seed, H. B., and Idriss, I. M. (1982). *Ground Motions and Soil Liquefaction During Earthquakes*, Earthquake Engrg. Res. Institute, Berkeley, CA.
23. Seed, H. B., Idriss, I. M., and Arango, I. (1983). "Evaluation of Liquefaction Potential Using Field Performance Data," *J. of Geotech. Engrg.*, ASCE, Vol. 109, No. 3, pp. 458-482.
24. Stokoe, K. H., II, Lee, S. H. H., and Knox, D. P. (1985). "Shear Moduli Measurements Under True Triaxial Stresses," *Proc., Advances in the Art of Testing Soil Under Cyclic Conditions*, ASCE, pp. 166-185.
25. Stokoe, K. H., II, Roësset, J. M., Bierschwale, J. G., and Aouad, M. (1988). "Liquefaction Potential of Sands from Shear Wave Velocity," *Proc., Ninth World Conf. on Earthquake Engrg.*, Tokyo, Japan, Vol. III, pp. 213-218.
26. Sykora, D. W. (1987). "Creation of a Data Base of Seismic Shear Wave Velocities for Correlation Analysis," *Geotech. Lab. Misc. Paper GL-87-26*, U.S. Army Engineer Waterways Exp. Station, Vicksburg, MS.
27. Tokimatsu, K., Kuwayama, S., and Tamura, S. (1991). "Liquefaction Potential Evaluation Based on Rayleigh Wave Investigation and Its Comparison with Field Behavior," *Proc., Second Int. Conf. on Recent Advances in Geotech. Earthquake Engrg. and Soil Dyn.*, S. Prakash, Ed., 11-15 Mar., St. Louis, MO, Univ. of Missouri at Rolla, Vol. I, pp. 357-364.
28. Tokimatsu, K., and Uchida, A. (1990). "Correlation Between Liquefaction Resistance and Shear Wave Velocity," *Soils and Found.*, Japanese Society of Soil Mechanics and Found. Engrg., Vol. 30, No. 2, pp. 33-42.
29. Youd, T. L., Idriss, I. M., Andrus, R. D., Arango, I., Castro, G., Christian, J. T., Dobry, R., Finn, W. D. L., Harder, L. F., Jr., Hynes, M. E., Ishihara, K., Koester, J. P., Liao, S. S. C., Marcuson, W. F., III, Martin, G. R., Mitchell, J. K., Moriwaki, Y., Power, M. S., Robertson, P. K., Seed, R. B., and Stokoe, K. H., II (1997). "Summary Report," *NCEER Workshop on Evaluation of Liquefaction Resistance of Soils*, Technical Report NCEER-97-0022, 4-5 Jan. 1996, Nat. Ctr. for Earthquake Engrg. Res., Buffalo, NY, pp. 1-40.

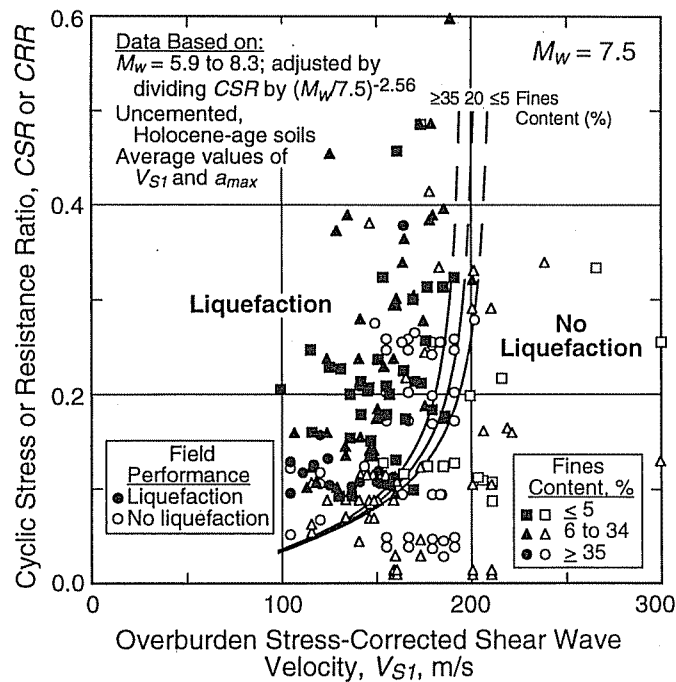


Fig. 1 - Curves Proposed by Andrus et al. (1999) for Calculation of CRR from V_S Measurements Along with Case History Data Based on Lower Bound Values of MSF for the Range Recommended by the 1996 NCEER Workshop (Youd et al., 1997) and Average r_d Values Developed by Seed and Idriss (1971).

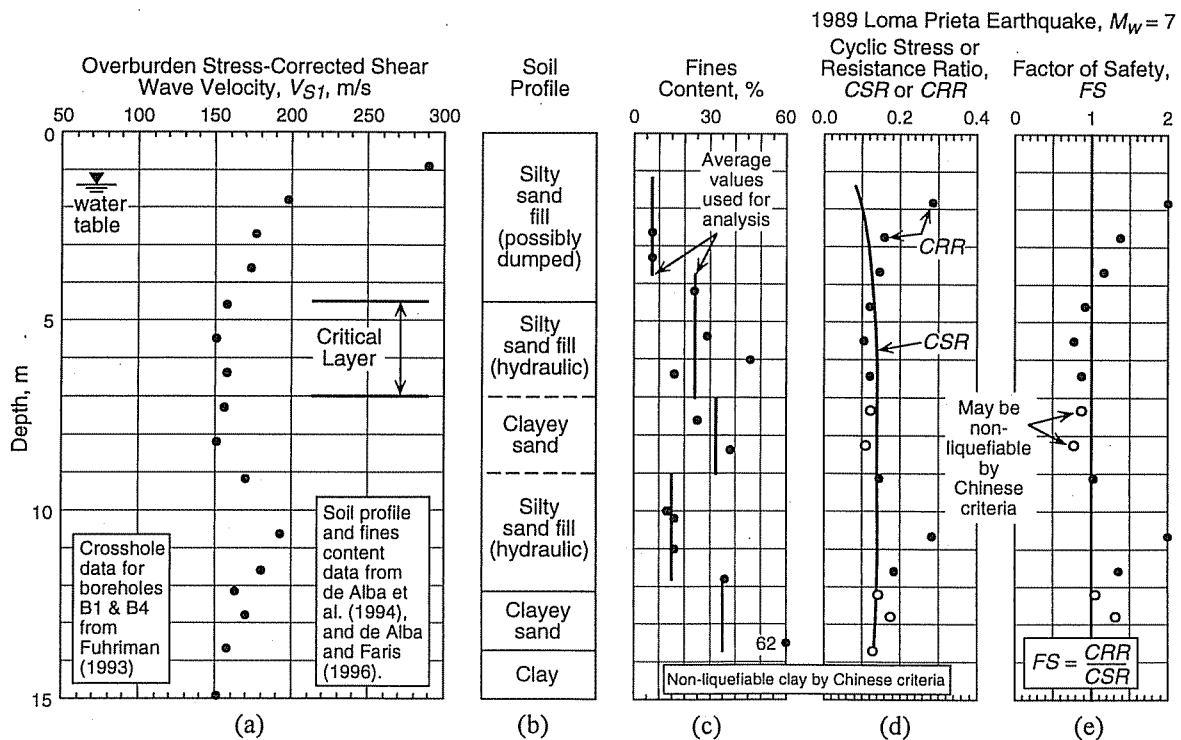


Fig. 2 - Application of the Recommended Procedure to the Treasure Island Fire Station Site, Crosshole Test Array B1-B4.